

74A
Chm



State of New Hampshire

DEPARTMENT OF SAFETY
OFFICE OF THE COMMISSIONER
33 HAZEN DR. CONCORD, NH 03305
603/271-2791

JOHN J. BARTHELMES
COMMISSIONER

March 25, 2013

Her Excellency, Governor Margaret Wood Hassan
and the Honorable Council
State House
Concord, New Hampshire 03301

Retroactive / Sole Source

Requested Action

Retroactively authorize the Department of Safety and the Department of Information Technology to procure a network switch, Cisco Model No. 6509, on a **sole source** basis, from ePlus Technology, Inc., Herndon, VA (Vendor #175802-P001) in an amount not to exceed \$67,636.80. Effective January 2, 2013. Funding source: 100% Capital (General).

Funds are available in SFY2013 in the following account:

01-03-03-030030-09790000	Dept. of Information Technology – Network Ops Upgrade
034-500099-Major IT Systems	
	<u>FY2013</u>
	\$67,636.80

Explanation

This **retroactive** procurement authorization is being requested in connection with the Core Network Refresh and Statewide Voice Over Internet Protocol (VoIP) conversion contract, in the amount of \$7,253,408, among the Department of Safety, Department of Information Technology and ePlus Technology, Inc., approved by Governor and Council on April 18, 2012 (Item #9B) (the "Contract.") The goal of the VoIP project is to obtain a modern Statewide communications network, with the survivable infrastructure necessary for its successful long-term operation. Consistent with those goals, and after the Contract was approved, the Department of Safety identified a need for the subject 6509 component, which provides a system redundancy to eliminate any disruption to emergency communications during the upgrading of the existing communications network. The component was procured from ePlus on a **sole source** basis to secure the Contract discount rate of 60% off list price, and the Department of Safety installed the component in January 2013. At the time of the procurement, it was unclear as to whether the subject 6509 component was included within the scope of the original Contract. Due to that uncertainty, the need to follow emergency procurement protocols was overlooked at the time of the procurement. Ultimately, the Department has concluded that the subject component was outside the scope of the Contract, and ought to be paid for due to its provision by ePlus in good faith, coupled with the fact that the subject component furthers the overall project goal of building a Statewide communications system with survivable infrastructure.

Respectfully Submitted,

John J. Barthelmes, Commissioner
Department of Safety

Peter C. Hastings, Commissioner
Department of Information Technology



IIINVOICE SUMMARY for 6509-ME3600 ORDER

Invoice #	Date	Amount	Description	Contract #	Coverage Period
V1402732	8/30/2012	\$ 55,221.12	Equipment as listed on quote # NHDPS-082712-02		
V1410059	9/20/2012	\$ -	Equipment as listed on quote # NHDPS-082712-02		
V1403422	8/31/2012	\$ 3,820.80	Equipment as listed on quote # NHDPS-082712-02		
V1403354	8/31/2012	\$ 15,437.76	Maintenance for 6509	91146022	10/16/12 - 10/15/12
V1416521	10/5/2012	\$ -	Maintenance for ME3600	91146022	10/19/12 - 10/18/15
R0053714	10/5/2012	\$ (13,754.88)	Credit memo for return of (36 of 48) GLC-LH-SM originally billed on invoice V1402732		
V1415494	10/3/2012	\$ 6,912.00	Invoice for (36) GLC-SX-MM to replace GLC-LH-SM returned on R0063714		

\$ 67,636.80 Total Amount Owed

Cisco Catalyst 6500-E Series Chassis


Product Overview

Cisco introduces the Cisco® Catalyst® 6500 Enhanced Series Chassis (6500-E Series) delivering up to 2 terabits per second of system bandwidth capacity and 80 Gbps of per-slot bandwidth. In a system configured for VSS, this translates to a system capacity of 4 Tbps. The Cisco® Catalyst® 6500 Enhanced Series Chassis will be capable of delivering up to 180 Gbps of per-slot bandwidth with a system capacity of up to 4 terabits per second. A system configured for VSS will be capable of delivering up to 8 Tbps of system bandwidth.

The Cisco Catalyst 6500-E Series Switch offers the broadest range of interface modules with industry-leading performance and advanced feature integration. The Cisco Catalyst 6500-E Series Switch also offers high port densities and comes in 3-, 4-, 6-, 9, 9-Vertical, and 13-slot versions that make it ideal for a range of deployment scenarios.

The Cisco Catalyst 6500-E Series Chassis provides superior investment protection by supporting multiple generations of products in the same chassis, lowering the total cost of ownership. The Cisco Catalyst 6500-E Series Chassis (Figure 1) supports all the Cisco Catalyst 6500 Supervisor Engines up to and including the Cisco Catalyst 6500 Series Supervisor Engine 2T, and associated LAN, WAN, and services modules.

Figure 1. Cisco Catalyst 6500-E Series Chassis

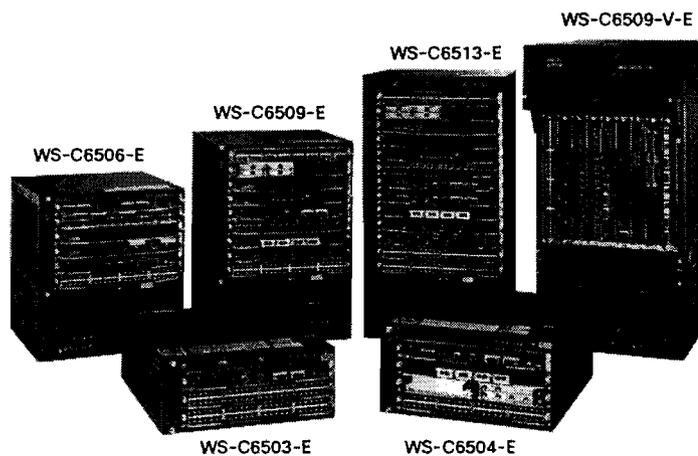

Applications

The versatile Cisco Catalyst 6500-E Series Chassis is ideal for addressing high-performance, high-port-density Fast Ethernet, Gigabit Ethernet, and 10 and 40 Gigabit Ethernet applications in all parts of the network. This series is ideally suited for enterprise core and aggregation environments. The Cisco Catalyst 6500-E Series chassis offers industry-leading 10/100/1000 Gigabit Ethernet, 10 Gigabit Ethernet and 40 Gigabit Ethernet port densities while providing high levels of network resilience.

Features and Benefits

Table 1 lists the Cisco Catalyst 6500-E Series Chassis features and benefits.

Table 1. Features and benefits

Feature	Benefit
Scalability	
3, 4, 6, 9, 9-V and 13-slot modular chassis Delivers up to 2 terabits per second of system bandwidth capacity and 80 Gbps per-slot for all slots. A system configured for VSS has a system capacity of 4 terabits per second. Capable of delivering up to 4 terabits per second of system bandwidth and 180Gbps of per-slot bandwidth. A system configured for VSS will be capable of delivering up to 8 Tbps of system capacity. High interface capacity	Allows flexibility and room for future growth Scales the system capacity for future needs Scales to high-density 40 Gigabit Ethernet, 10 Gigabit Ethernet and Gigabit Ethernet configurations
Increased resiliency	
Standby fabric hot sync Redundant control channel Redundant supervisor engine option Redundant power supply option Fan tray	Decreases the supervisor engine switchover time of Supervisor Engine 720 and Supervisor Engine 2T based systems to between 50 and 200 ms, depending on the modules being used Increases resiliency to protect against backplane control channel failures Increases availability with redundant supervisor engine options Supports redundant power supplies for increased availability Supports hot-swappable fan tray The 6509-V-E provides for redundant, hot-swappable fan trays
Environmental	
Side-to-side airflow (except Cisco Catalyst 6509-V-E) AC and DC power supply Network Equipment Building Standards Layer 3 (NEBS L3) compliant	Allows ease of access to ports and cables 6509-V-E has front-to-back air flow to support hot aisle or cold aisle designs Supports both AC and DC power supply options, including AC and DC mixing Supports NEBS L3 compliance for deployment in demanding environments

Product Specifications

Table 2 lists the Cisco Catalyst 6500-E Series Product Specifications.

Table 2. Product Specifications

	6503-E	6504-E	6506-E	6509-E	6509-V-E	6513-E
Number of Slots	3	4	6	9	9	13
Supervisor Compatibility	Cisco Catalyst 6500 Series Supervisor Engine 32 Cisco Catalyst 6500 Series Supervisor Engine 720-3B Cisco Catalyst 6500 Series Supervisor Engine 720-3BXL Cisco Catalyst 6500 Series Supervisor Engine 720-10G-3C Cisco Catalyst 6500 Series Supervisor Engine 720-10G-3CXL Cisco Catalyst 6500 Series Supervisor Engine 2T					
Power Supply Compatibility	AC: 1400W, 950W	AC: 2700W DC: 2700W	AC: 2500W, 3000W, 4000W, 6000W, 8700W DC: 2500W, 4000W, 6000W	AC: 2500W, 3000W, 4000W, 6000W, 8700W DC: 2500W, 4000W, 6000W	AC: 2500W, 3000W, 4000W, 6000W, 8700W DC: 2500W, 4000W, 6000W	AC: 3000W, 4000W, 6000W, 8700W DC: 2500W, 4000W, 6000W
Indicates EoS Power Supply	DC: 950W					
Module Compatibility	All modules based on the software release in the system					

	6503-E	6504-E	6506-E	6509-E	6509-V-E	6513-E
Software Compatibility (Minimum Software Version)						
With Supervisor Engine 32	• 12.2(18)SXF	• 12.2(18)SXF	• 12.2(18)SXF	• 12.2(18)SXF	• 12.2(18)SXF10	• 12.2(33)SXI1 • 12.2(33)SXH2 • 12.2(18)SXF14
With Supervisor Engine 720	• 12.2(14)SX	• 12.2(18)SXE	• 12.2(14)SX	• 12.2(14)SX	• 12.2(18)SXF10	• 12.2(33)SXI1 • 12.2(33)SXH2 • 12.2(18)SXF14
With Supervisor Engine 720-10 GE	• 12.2(33)SXH	• 12.2(33)SXH	• 12.2(33)SXH	• 12.2(33)SXH	• 12.2(33)SXH	• 12.2(33)SXI1 • 12.2(33)SXH2
With Supervisor Engine 2T-10 GE	• 15.0(1)SY	• 15.0(1)SY	• 15.0(1)SY	• 15.0(1)SY	• 15.0(1)SY	• 15.0(1)SY
Reliability and Availability Calculated Mean Time Between Failure (MTBF)	860,868	677,643	441,418	348,935	330,888	311,778
MIBS	Check the corresponding supervisor engine data sheet					
Network Management	Check the corresponding supervisor engine data sheet					
Physical Dimensions						
Inches	7 x 17.37 x 21.75	8.75 x 17.5 x 21.75	19.2 x 17.5 x 18	24.5 x 17.5 x 18.2	36.65 x 17.2 x 20.7	32.7 x 17.3 x 18.1
Centimeters	17.8 x 44.1 x 55.2	22.2 x 44.45 x 55.25	48.8 x 44.5 x 46.0	62.2 x 44.5 x 46.0	93.3 x 43.1 x 53.3	83.0 x 43.9 x 46
Rack Units (RU)	4	5	11	14	21	19
Weight						
Chassis Only (lbs)	33	40	50	60	121	102
Fully Configured (lbs)	85.4	97	159	190	270	280
Input Voltage	100 to 240 VAC -48 to -60 VDC					
Safety	UL 60950 Second Edition CAN/CSA-C22.2 No. 60950 Second Edition EN 60950 Second Edition IEC 60950 Second Edition AS/NZS 60950					
EMC	FCC Part 15 (CFR 47) Class A VCCI Class A EN55022 Class A CISPR 22 Class A CE marking AS/NZS 3548 Class A ETS300 386 EN55024 EN61000-6-1 EN50082-1					
NEBS/ETSI	GR-1089-Core NEBS Level 3 ETS 300 019 Storage Class 1.1 ETS 300 019 Transportation Class 2.3 ETS 300 019 Stationary Use Class 3.1					

	6503-E	6504-E	6506-E	6509-E	6509-V-E	6513-E
ATIS Pb free and Energy Efficiency	ATIS-0600020.2010 Pb Free circuit packs ATIS-0600015-2009 General Energy Efficiency Requirements (TEER) ATIS-0600015.03-2009 Switch and Router Energy Efficiency ATIS-0600015.01-2009 Server Energy Efficiency VZ.TPR.9205 Verizon Energy Efficiency Requirements for Telecommunication Equipment (TEEER)					
Operating Environment						
Operating Temperature	32F to 104F (0 to 40°C)					
Storage Temperature	-4 to 149F (-20 to 65°C)					
Thermal Transition	0.5°C per minute (hot to cold) 0.33°C per minute (cold to hot)					
Relative Humidity	Ambient (noncondensing) operating: 5% to 90% Ambient (noncondensing) nonoperating and storage: 5% to 95%					
Operating Altitude	Certified for operation: 0 to 6500 ft (0 to 2000 m) Designed and tested for operation: -200 to 10,000 ft (-60 to 3000 m)					

Ordering Information

Table 3 lists the ordering information for the Cisco Catalyst 6500-E Series Chassis. To place an order, visit the [Cisco ordering homepage](#).

Table 3. Ordering Information

Product Name	Part Number
Cisco Catalyst 6503 Enhanced Chassis	WS-C6503-E
Cisco Catalyst 6503 Enhanced Chassis Spare	WS-C6503-E=
Cisco Catalyst 6503 Enhanced Chassis Fan Tray Spare	WS-C6503-E-FAN=
Cisco Catalyst 6504 Enhanced Chassis	WS-C6504-E
Cisco Catalyst 6504 Enhanced Chassis Spare	WS-C6504-E=
Cisco Catalyst 6504 Enhanced Chassis Fan Tray Spare	WS-C6504-E-FAN=
Cisco Catalyst 6506 Enhanced Chassis	WS-C6506-E
Cisco Catalyst 6506 Enhanced Chassis Spare	WS-C6506-E=
Cisco Catalyst 6506 Enhanced Chassis Fan Tray Spare	WS-C6506-E-FAN=
Cisco Catalyst 6509 Enhanced Chassis	WS-C6509-E
Cisco Catalyst 6509 Enhanced Chassis Spare	WS-C6509-E=
Cisco Catalyst 6509 Enhanced Chassis Fan Tray Spare	WS-C6509-E-FAN=
Cisco Catalyst 6509 Vertical Enhanced Chassis	WS-C6509-V-E
Cisco Catalyst 6509 Vertical Enhanced Chassis Spare	WS-C6509-V-E=
Cisco Catalyst 6509 Vertical Enhanced Chassis Fan Tray Spare	WS-C6509-V-E-FAN=
Cisco Catalyst 6513 Enhanced Chassis	WS-C6513-E
Cisco Catalyst 6513 Enhanced Chassis Spare	WS-C6513-E=
Cisco Catalyst 6513 Enhanced Chassis Fan Tray Spare	WS-C6513-E-FAN=
Cisco Catalyst 6500 1400 W AC Power Supply	PWR-1400-AC=
Cisco Catalyst 6500 2700W AC Power Supply	PWR-2700-AC/4=
Cisco Catalyst 6500 3000W AC Power Supply	WS-CAC-3000W=
Cisco Catalyst 6500 6000W AC Power Supply	WS-CAC-6000W=
Cisco Catalyst 6500 8700W Enhanced AC Power Supply	WS-CAC-8700W-E=
Cisco Catalyst 6500 4000W AC Power Supply for US	WS-CAC-4000W-US=

Product Name	Part Number
Cisco Catalyst 6500 4000W AC Power Supply for International	WS-CAC-4000W-INT=
Cisco Catalyst 6500 2500W DC Power Supply	WS-CDC-2500W=
Cisco Catalyst 6500 2700W DC Power Supply	PWR-2700-DC/4=
Cisco Catalyst 6500 4000W DC Power Supply	PWR-4000-DC=
Cisco Catalyst 6500 6000W DC Power Supply	PWR-6000-DC=

For More Information

For more information about the Cisco Catalyst 6500-E Series chassis, visit:

<http://www.cisco.com/en/US/partner/products/hw/switches/ps708>.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

