



**THE STATE OF NEW HAMPSHIRE  
DEPARTMENT OF TRANSPORTATION**



97  
Beane

**CHRISTOPHER D. CLEMENT, SR.  
COMMISSIONER**

**JEFF BRILLHART, P.E.  
ASSISTANT COMMISSIONER**

Bureau of Construction  
April 16, 2014

Her Excellency, Governor Margaret Wood Hassan  
and the Honorable Council  
State House  
Concord, New Hampshire 03301

**REQUESTED ACTION**

1. Authorize the Department of Transportation to enter into a contract with American Excavating, Corp. (Vendor 156914) of Derry, NH on the basis of a low bid of \$1,135,314.54 for intersection improvements on NH 28 at Kilrea Road in the Town of Derry, from the date of Governor and Council approval through August 28, 2015 unless extended by the Department in accordance with the Standard Specifications. 100% Federal Funds.

Funding is available as follows: FY 2014  
04-96-96-963515-3054  
Consolidated Federal Aid  
400-500870 Highway Contract Payments \$1,135,314.54

2. Further authorize that a contingency in the amount of \$79,472.02 be approved for payment of latent conditions, which may appear during the construction of the project. The contingency requested is 7% of the contract amount.

Funding is available as follows: FY 2014  
04-96-96-963515-3054  
Consolidated Federal Aid  
400-500870 Highway Contract Payments \$79,472.02

**EXPLANATION**

This project is part of the annual Highway Safety Improvement Program. This intersection was identified as a high accident location by the Highway Safety Improvement Program. The work involves widening NH 28 at the intersection to provide turn lanes and shoulders, install traffic signals, replace existing guardrail, and improve drainage. Vehicles entering or crossing NH 28 from the side roads experience long delays due to the volume and speed of NH 28 traffic. Also, NH 28 lacks left turn lanes or sufficient width to allow through traffic to safely bypass stopped left-turning vehicles. This section of NH 28 was originally constructed in 1931. This area has been resurfaced many times with the last treatment in 2009. Kilrea Road and Windham Depot Road are maintained by the Town of Derry. This project will improve safety at the intersection.

The contingency amount is proposed to be 7% of the contract amount. Project limits are fixed and cannot be adjusted to offset quantity over runs and there is the potential for encountering contaminated soil and/or groundwater.


Although the bid costs exceeded the Department's estimate, the low bid is felt to be reasonable for the work involved. Re-advertising this project would result, in our opinion, in higher prices and prevent the completion of the work in a timely manner. The Department considers it to be in the best interest of the State to accept this bid to accomplish these needed repairs.

The Contractor has been prequalified by this Department. The Contract has been approved by the Attorney General as to form and execution, and the Department has certified that the necessary funds are available. Copies of the fully executed contract are on file at the Secretary of State's Office and the Department of Administrative Service's Office, and subsequent to Governor and Council approval will be on file at the Department of Transportation.

This project funding is 90% federal funds with 10% state match. Turnpike toll credit is being utilized for match requirements, effectively using 100% federal funds.

A copy of the Tabulation of Bids received for this project is attached along with the Contract Supplemental Sheet and a map indicating the location of the project.

Sincerely,

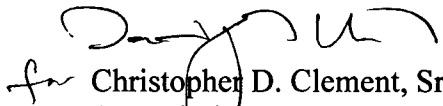  
for Christopher D. Clement, Sr.  
Commissioner

CDC/md

Department Estimate: \$1,035,628.50  
Contract Amount:     \$1,135,314.54  
Over Estimate:         \$   99,686.04

Attachments

February 14, 2014

## SUPPLEMENTAL PROJECT INFORMATION SHEET

**DESCRIPTION:** The project will widen NH 28, providing 11' travel lanes, 11' left turn lanes, and 4' shoulders, install traffic signals, replace existing guardrail, and improve drainage and access. The project begins on NH Route 28, approximately 1000' north of the intersection of Kilrea Road and Windham Depot Road and continues southerly along NH 28 approximately 0.4 miles. Work on Kilrea Rd extends to 220' northeast of NH 28. Work on Windham Depot Rd extends to 400' southwest of NH 28.

**FEDERAL FUNDING:** This project funding is 90% federal funds with 10% state match. Turnpike toll credit is being utilized for match requirements, effectively using 100% federal funds.

**CONTINGENCY:** Further authorize that a contingency of 7% of the contract amount be approved. Project limits are fixed and cannot be adjusted to offset quantity over runs, and there is the potential for encountering contaminated soil and/or groundwater.


**PROJECT INITIATED:** The project was initiated through the State 10-Year Transportation Improvement Program, and is part of the HSIP Program.

**PROJECT EXPLANATION:** This intersection was identified as a high accident location by the Highway Safety Improvement Program (HSIP). Vehicles entering or crossing NH 28 from the side roads experience long delays due to the volume and speed of NH 28 traffic. Also, NH 28 lacks left turn lanes or sufficient width to allow through traffic to safely bypass stopped left-turning vehicles. This section of NH 28 was originally constructed in 1931. This area has been resurfaced many times with the last treatment in 2009 (¾" paver shim). Kilrea Rd. and Windham Depot Rd. are maintained by the Town of Derry.

**TRAFFIC IMPLICATION:** Two-way traffic will be maintained on pavement having a minimum width of 11 foot travel lanes and two foot shoulders (when adjacent to portable concrete barrier). Lane closures with one lane, 2-way traffic will be required for step widening, paving, and drainage rehabilitation on NH 28, and for roadway reconstruction on side roads. Two-way traffic will be restored during non-work hours. Lane closures will not be allowed during peak commuting times (Monday – Friday from 3 pm to 6 pm).

**INTERMEDIATE COMPLETION DATE:** 60 calendar days after Notice to Proceed for advance work required prior to the start of utility relocations and for placement of surcharge loading on a muck area.

**FINAL COMPLETION DATE:** Friday August 28, 2015

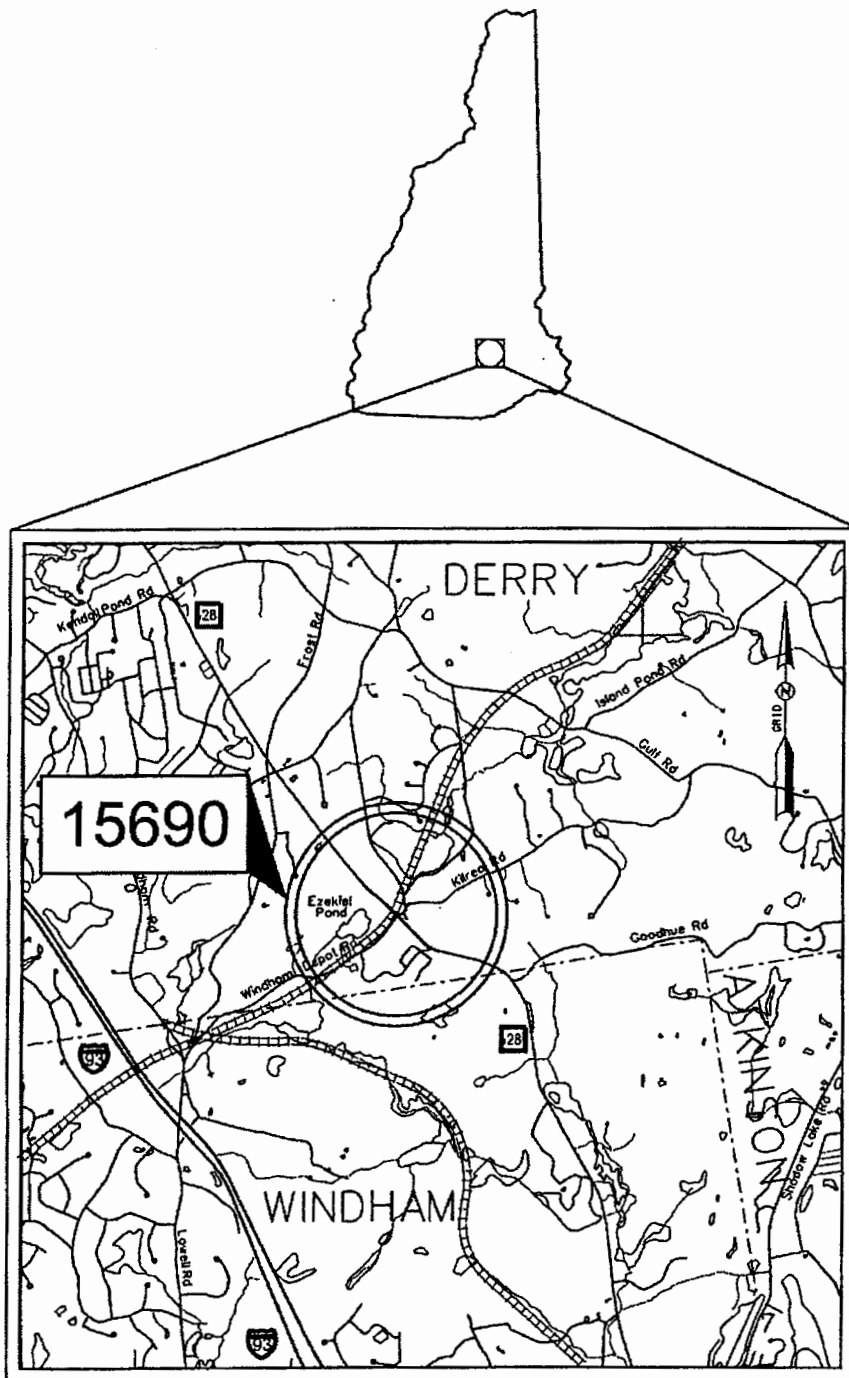

LOCATION MAP



GRAPHIC SCALE

STATE OF NEW HAMPSHIRE			
DEPARTMENT OF TRANSPORTATION • BUREAU OF HIGHWAY DESIGN			
<i>Location Map</i>			
DGN	STATE PROJECT NO.	SHEET NO.	SHEET TOTAL
	15690	1	1

**State of New Hampshire  
Department of Transportation**

15690.01

**Project:** DERRY X-A000(897) 15690  
**County and Code:** ROCKINGHAM COUNTY 015  
**Date Bids Open:** March 27, 2014  
**Scope of Work:** ROADWAY IMPROVEMENTS  
**Location:** NH 28 IN DERRY  
**Completion Date:** August 28, 2015

A AMERICAN EXCAVATING CORPORATION  
5 MADDEN ROAD, DERRY, NH 03038  
\$1,135,314.54

B RM PIPER INC (R001)  
PO BOX 490 PLYMOUTH, NH 03264  
\$1,385,614.50

Item No:	Description	Unit	Quantity	A		B		Unit Price	Total
				Unit Price	Total	Unit Price	Total		
201.1	CLEARING AND GRUBBING (F)	A	0.20	\$33,622.99	\$6,724.60	\$12,000.00	\$2,400.00		
201.881	INVASIVE SPECIES CONTROL TYPE I	SY	200.00	\$3.50	\$700.00	\$3.00	\$600.00		
201.882	INVASIVE SPECIES CONTROL TYPE II	SY	450.00	\$4.50	\$2,025.00	\$3.00	\$1,350.00		
202.31	FILL ABANDONED PIPE	CY	5.00	\$159.64	\$798.20	\$300.00	\$1,500.00		
202.41	REMOVAL OF EXISTING PIPE 0-24" DIAMETER	LF	45.00	\$7.60	\$342.00	\$20.00	\$900.00		
202.5	REMOVAL OF CATCH BASINS, DROP INLETS, AND MANHOLES	EA	2.00	\$443.31	\$886.62	\$275.00	\$550.00		
202.7	REMOVAL OF GUARDRAIL	LF	115.00	\$2.86	\$328.90	\$1.00	\$115.00		
202.8	REMOVAL OF FENCE	LF	360.00	\$0.62	\$223.20	\$5.00	\$1,800.00		
202.851	REMOVAL OF FLASHING BEACON	U	1.00	\$300.00	\$300.00	\$4,200.00	\$4,200.00		
203.1	COMMON EXCAVATION	CY	5,600.00	\$7.15	\$40,040.00	\$12.00	\$67,200.00		
203.4	MUCK EXCAVATION	CY	230.00	\$6.15	\$1,414.50	\$20.00	\$4,600.00		
203.5525	PORTABLE CHANGEABLE MESSAGE SIGN PLATFORM	U	2.00	\$909.74	\$1,819.48	\$950.00	\$1,900.00		
203.5554	GUARDRAIL 50' EAGRT PLATFORM	U	4.00	\$557.79	\$2,231.16	\$1,900.00	\$7,600.00		
203.6	EMBANKMENT-IN-PLACE (F)	CY	750.00	\$1.51	\$1,132.50	\$20.00	\$15,000.00		
206.19	COMMON STRUCTURE EXCAVATION	CY	10.00	\$56.14	\$561.40	\$20.00	\$200.00		
206.2	ROCK STRUCTURE EXCAVATION	CY	15.00	\$92.28	\$1,384.20	\$75.00	\$1,125.00		
209.1	GRANULAR BACKFILL	CY	75.00	\$15.09	\$1,131.75	\$30.00	\$2,250.00		
211.11	VIBRATION MONITORING SERVICES	HR	20.00	\$45.00	\$900.00	\$95.00	\$1,900.00		
214	FINE GRADING	U	1.00	\$33,680.54	\$33,680.54	\$12,500.00	\$12,500.00		
304.101	SAND	CY	1,300.00	\$16.58	\$21,554.00	\$22.00	\$28,600.00		
304.201	GRAVEL	CY	230.00	\$17.05	\$3,921.50	\$30.00	\$6,900.00		

Item No:	Description	Unit	Quantity	A		B	
				Unit Price	Total	Unit Price	Total
304.399	TEMPORARY CRUSHED GRAVEL	CY	205.00	\$26.75	\$5,483.75	\$30.00	\$6,150.00
304.4	CRUSHED STONE (FINE GRADATION) (F)	CY	1,095.00	\$22.09	\$24,188.55	\$35.00	\$38,325.00
304.45	CRUSHED STONE (FINE GRADATION) FOR DRIVES	CY	400.00	\$29.93	\$11,972.00	\$35.00	\$14,000.00
304.5	CRUSHED STONE (COARSE GRADATION) (F)	CY	1,900.00	\$20.68	\$39,292.00	\$35.00	\$66,500.00
403.11002	HOT BITUMINOUS PAVEMENT, MACHINE METHOD (QC/QA TIER 2)	TON	1,450.00	\$75.42	\$109,359.00	\$75.00	\$108,750.00
403.1109	HOT BITUMINOUS PAVEMENT, MACHINE METHOD, HIGH STRENGTH	TON	800.00	\$85.62	\$68,496.00	\$85.00	\$68,000.00
403.12	HOT BITUMINOUS PAVEMENT, HAND METHOD	TON	335.00	\$110.00	\$36,850.00	\$100.00	\$33,500.00
403.6	PAVEMENT JOINT ADHESIVE	LF	29,300.00	\$0.23	\$6,739.00	\$0.30	\$8,790.00
403.99	TEMPORARY BITUMINOUS PAVEMENT	TON	180.00	\$102.54	\$18,457.20	\$105.00	\$18,900.00
411.1	HOT BITUMINOUS CONCRETE LEVELING COURSE	TON	200.00	\$80.00	\$16,000.00	\$80.00	\$16,000.00
415.8	GLASS FIBER PAVEMENT REINFORCEMENT MESH	SY	6,400.00	\$9.19	\$58,816.00	\$1.60	\$10,240.00
417	COLD PLANING BITUMINOUS SURFACES	SY	3,450.00	\$2.64	\$9,108.00	\$3.25	\$11,212.50
520.1	CONCRETE CLASS A	CY	3.00	\$450.00	\$1,350.00	\$800.00	\$2,400.00
544.1	REINFORCING STEEL (ROADWAY)	LB	40.00	\$2.00	\$80.00	\$1.50	\$60.00
585.3	STONE FILL, CLASS C	CY	30.00	\$28.82	\$864.60	\$45.00	\$1,350.00
593.421	GEOTEXTILE; PERM CONTROL CL.2, NON-WOVEN	SY	85.00	\$2.00	\$170.00	\$2.60	\$221.00
603.0001	VIDEO INSPECTION	LF	800.00	\$0.91	\$728.00	\$5.00	\$4,000.00
603.00212	12" R.C. PIPE, 2000D	LF	440.00	\$32.98	\$14,511.20	\$45.00	\$19,800.00

Item No:	Description	Unit	Quantity	A		B	
				Unit Price	Total	Unit Price	Total
603.00215	15" R.C. PIPE, 2000D	LF	120.00	\$57.44	\$6,892.80	\$90.00	\$10,800.00
603.00218	18" R.C. PIPE, 2000D	LF	120.00	\$61.26	\$7,351.20	\$100.00	\$12,000.00
603.00318	18" R.C. PIPE, 3000D	LF	55.00	\$60.69	\$3,337.95	\$105.00	\$5,775.00
603.00324	24" R.C. PIPE, 3000D	LF	55.00	\$73.89	\$4,063.95	\$115.00	\$6,325.00
603.30112	12" R.C. END SECTIONS	EA	4.00	\$400.00	\$1,600.00	\$450.00	\$1,800.00
603.30115	15" R.C. END SECTIONS	EA	3.00	\$460.00	\$1,380.00	\$600.00	\$1,800.00
603.30118	18" R.C. END SECTIONS	EA	3.00	\$520.00	\$1,560.00	\$625.00	\$1,875.00
603.30124	24" R.C. END SECTIONS	EA	2.00	\$600.00	\$1,200.00	\$675.00	\$1,350.00
604.0007	POLYETHYLENE LINER	EA	6.00	\$120.00	\$720.00	\$230.00	\$1,380.00
604.12	CATCH BASINS TYPE B	U	8.00	\$2,384.01	\$19,072.08	\$2,500.00	\$20,000.00
604.19	SPECIAL CATCH BASINS	U	1.00	\$1,717.54	\$1,717.54	\$3,600.00	\$3,600.00
604.32	DRAINAGE MANHOLES	U	1.00	\$1,762.83	\$1,762.83	\$2,450.00	\$2,450.00
604.5	RECONSTRUCTING/ADJUSTING MANHOLES	LF	2.00	\$393.30	\$786.60	\$375.00	\$750.00
606.1254	BEAM GUARDRAIL (TERMINAL UNIT TYPE EAGRT 50 FT) (STEEL POST)	U	5.00	\$1,960.00	\$9,800.00	\$1,900.00	\$9,500.00
606.1255	BEAM GUARDRAIL (TERMINAL UNIT TYPE EAGRT 25 FT) (STEEL POST)	U	1.00	\$1,760.00	\$1,760.00	\$1,500.00	\$1,500.00
606.18001	31" W-BEAM GUARDRAIL WITH 8" OFFSET BLOCK (STEEL POST)	LF	1,250.00	\$17.77	\$22,212.50	\$17.00	\$21,250.00
606.417	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL	LF	520.00	\$4.97	\$2,584.40	\$26.50	\$13,780.00
606.9513	TEMP. IMPACT ATTENUATION DEVICE (REDIRECTIVE), TEST LEVEL 3	U	2.00	\$7,950.00	\$15,900.00	\$3,500.00	\$7,000.00
609.01	STRAIGHT GRANITE CURB	LF	350.00	\$19.04	\$6,664.00	\$22.00	\$7,700.00
609.21	STRAIGHT GRANITE SLOPE CURB	LF	110.00	\$14.91	\$1,640.10	\$17.00	\$1,870.00



Item No:	Description	Unit	Quantity	A		B	
				Unit Price	Total	Unit Price	Total
612.189	ALTERATIONS TO SEPTIC SYSTEM	U	1.00	\$1,152.15	\$1,152.15	\$3,000.00	\$3,000.00
614.331	3" STEEL CONDUIT	LF	10.00	\$20.00	\$200.00	\$21.00	\$210.00
614.511	CONCRETE PULL BOX 14"	EA	5.00	\$325.00	\$1,625.00	\$350.00	\$1,750.00
614.73114	3" PVC CONDUIT, SCHEDULE 40	LF	105.00	\$25.00	\$2,625.00	\$26.50	\$2,782.50
614.73118	3" PVC CONDUIT, SCHEDULE 80	LF	220.00	\$35.00	\$7,700.00	\$37.00	\$8,140.00
615.03	TRAFFIC SIGN TYPE C (F)	SF	191.00	\$40.00	\$7,640.00	\$42.50	\$8,117.50
615.06	TRAFFIC SIGN TYPE CC (F)	SF	84.00	\$20.00	\$1,680.00	\$19.00	\$1,596.00
616.101	TRAFFIC SIGNALS	U	1.00	\$83,500.00	\$83,500.00	\$90,000.00	\$90,000.00
618.61	UNIFORMED OFFICERS WITH VEHICLE	\$	71,000.00	\$1.00	\$71,000.00	\$1.00	\$71,000.00
618.7	FLAGGERS	HR	2,100.00	\$20.50	\$43,050.00	\$22.50	\$47,250.00
619.1	MAINTENANCE OF TRAFFIC	U	1.00	\$36,226.16	\$36,226.16	\$45,000.00	\$45,000.00
619.25	PORTABLE CHANGEABLE MESSAGE SIGN	U	2.00	\$3,600.00	\$7,200.00	\$7,500.00	\$15,000.00
619.27	TRAILER-MOUNTED SPEED LIMIT SIGN	U	2.00	\$1,600.00	\$3,200.00	\$5,000.00	\$10,000.00
621.2	RETROREFLECTIVE BEAM GUARDRAIL DELINEATOR	EA	20.00	\$4.00	\$80.00	\$5.00	\$100.00
622.1	STEEL WITNESS MARKERS	EA	15.00	\$17.00	\$255.00	\$20.00	\$300.00
622.2	CONCRETE BOUNDS	EA	8.00	\$168.00	\$1,344.00	\$200.00	\$1,600.00
628.2	SAWED BITUMINOUS PAVEMENT	LF	3,800.00	\$1.01	\$3,838.00	\$2.50	\$9,500.00
632.0104	RETROREFLECTIVE PAINT PAVE. MARKING, 4" LINE	LF	42,600.00	\$0.20	\$8,520.00	\$0.16	\$6,816.00
632.0118	RETROREFLECTIVE PAINT PAVE. MARKING, 18" LINE	LF	170.00	\$1.50	\$255.00	\$3.20	\$544.00
632.3104	RETROREFLECT. THERMOPLAS. PAVE. MARKING, 4" LINE	LF	200.00	\$1.50	\$300.00	\$2.10	\$420.00
632.3118	RETROREFLECT. THERMOPLAS. PAVE. MARKING, 18" LINE	LF	90.00	\$5.00	\$450.00	\$6.25	\$562.50

Item No:	Description	Unit	Quantity	A		B		Unit Price	Total
				Unit Price	Total	Unit Price	Total		
632.32	RETROREFLECT. THERMOPLAS. PAVEMENT MARKING, SYMBOL OR WORD	SF	290.00	\$5.00	\$1,450.00	\$7.50	\$2,175.00		
632.911	OBLITERATE PAVE. MARKING LINE, 12" WIDE & UNDER	LF	9,150.00	\$0.75	\$6,862.50	\$0.55	\$5,032.50		
641	LOAM	CY	300.00	\$28.51	\$8,553.00	\$34.00	\$10,200.00		
645.3	EROSION STONE	TON	100.00	\$27.82	\$2,782.00	\$25.00	\$2,500.00		
645.43	TEMPORARY SLOPE STABILIZATION TYPE C	SY	1,150.00	\$1.75	\$2,012.50	\$2.00	\$2,300.00		
645.531	SILT FENCE	LF	6,250.00	\$1.93	\$12,062.50	\$3.00	\$18,750.00		
645.7	STORM WATER POLLUTION PREVENTION PLAN	U	1.00	\$2,400.00	\$2,400.00	\$6,500.00	\$6,500.00		
645.71	MONITORING SWPPP AND EROSION AND SEDIMENT CONTROLS	HR	360.00	\$65.00	\$23,400.00	\$50.00	\$18,000.00		
646.3	TURF ESTABLISHMENT WITH MULCH AND TACKIFIERS	A	1.50	\$1,950.00	\$2,925.00	\$2,100.00	\$3,150.00		
647.1	HUMUS	CY	500.00	\$22.29	\$11,145.00	\$15.00	\$7,500.00		
670.066	MAILBOX SUPPORT ASSEMBLIES	EA	5.00	\$61.67	\$308.35	\$160.00	\$800.00		
670.104	TEMPORARY PORTABLE LIGHTING	U	1.00	\$1,870.80	\$1,870.80	\$6,000.00	\$6,000.00		
670.401	FOUNDATION PRELOAD	U	1.00	\$16,724.12	\$16,724.12	\$30,000.00	\$30,000.00		
692	MOBILIZATION	U	1.00	\$36,498.66	\$36,498.66	\$150,000.00	\$150,000.00		
697.11	INVASIVE SPECIES CONTROL AND MANAGEMENT PLAN	U	1.00	\$750.00	\$750.00	\$1,500.00	\$1,500.00		
697.31	PROJECT OPERATIONS PLAN	U	1.00	\$2,000.00	\$2,000.00	\$2,650.00	\$2,650.00		
697.41	CRITICAL PATH METHOD (CPM) ELECTRONIC SCHEDULE	U	1.00	\$884.00	\$884.00	\$3,500.00	\$3,500.00		
698.13	FIELD OFFICE TYPE C	MON	16.00	\$1,200.00	\$19,200.00	\$1,400.00	\$22,400.00		

Item No:	Description	Unit	Quantity	A			B		
				Unit Price	Total	Unit Price	Total	Unit Price	Total
699	MISCELLANEOUS TEMPORARY EROSION AND SEDIMENT CONTROL	\$	5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00
1009.21	TREATMENT OR DISPOSAL OF CONTAMINATED GROUNDWATER (FRAC TANK)	\$	5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00
1010.15	FUEL ADJUSTMENT	\$	20,000.00	\$1.00	\$20,000.00	\$1.00	\$20,000.00	\$1.00	\$20,000.00
1010.2	ASPHALT CEMENT ADJUSTMENT	\$	10,000.00	\$1.00	\$10,000.00	\$1.00	\$10,000.00	\$1.00	\$10,000.00
1010.3	QUALITY CONTROL QUALITY ASSURANCE(QC/QA) ASPHALT	\$	5,075.00	\$1.00	\$5,075.00	\$1.00	\$5,075.00	\$1.00	\$5,075.00
					\$1,135,314.54		\$1,385,614.50		

# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No:	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
201.1	CLEARING AND GRUBBING (F)	A	0.20	\$33,622.99	\$6,724.60	\$4,750.00	\$950.00	\$5,774.60
201.881	INVASIVE SPECIES CONTROL TYPE I	SY	200.00	\$3.50	\$700.00	\$1.50	\$300.00	\$400.00
201.882	INVASIVE SPECIES CONTROL TYPE II	SY	450.00	\$4.50	\$2,025.00	\$3.00	\$1,350.00	\$675.00
202.31	FILL ABANDONED PIPE	CY	5.00	\$159.64	\$798.20	\$150.00	\$750.00	\$48.20
202.41	REMOVAL OF EXISTING PIPE 0-24" DIAMETER	LF	45.00	\$7.60	\$342.00	\$10.00	\$450.00	(\$108.00)
202.5	REMOVAL OF CATCH BASINS, DROP INLETS, AND MANHOLES	EA	2.00	\$443.31	\$886.62	\$250.00	\$500.00	\$386.62
202.7	REMOVAL OF GUARDRAIL	LF	115.00	\$2.86	\$328.90	\$1.50	\$172.50	\$156.40
202.8	REMOVAL OF FENCE	LF	360.00	\$0.62	\$223.20	\$1.50	\$540.00	(\$316.80)
202.851	REMOVAL OF FLASHING BEACON	U	1.00	\$300.00	\$300.00	\$3,000.00	\$3,000.00	(\$2,700.00)
203.1	COMMON EXCAVATION	CY	5,600.00	\$7.15	\$40,040.00	\$5.00	\$28,000.00	\$12,040.00
203.4	MUCK EXCAVATION	CY	230.00	\$6.15	\$1,414.50	\$6.00	\$1,380.00	\$34.50
203.5525	PORTABLE CHANGEABLE MESSAGE SIGN PLATFORM	U	2.00	\$909.74	\$1,819.48	\$750.00	\$1,500.00	\$319.48
203.5554	GUARDRAIL 50' EAGRT PLATFORM	U	4.00	\$557.79	\$2,231.16	\$750.00	\$3,000.00	(\$768.84)
203.6	EMBANKMENT-IN-PLACE (F)	CY	750.00	\$1.51	\$1,132.50	\$4.50	\$3,375.00	(\$2,242.50)
206.19	COMMON STRUCTURE EXCAVATION EXPLORATORY	CY	10.00	\$56.14	\$561.40	\$40.00	\$400.00	\$161.40
206.2	ROCK STRUCTURE EXCAVATION	CY	15.00	\$92.28	\$1,384.20	\$60.00	\$900.00	\$484.20
209.1	GRANULAR BACKFILL	CY	75.00	\$15.09	\$1,131.75	\$35.00	\$2,625.00	(\$1,493.25)
211.11	VIBRATION MONITORING SERVICES	HR	20.00	\$45.00	\$900.00	\$75.00	\$1,500.00	(\$600.00)
214	FINE GRADING	U	1.00	\$33,680.54	\$33,680.54	\$11,000.00	\$11,000.00	\$22,680.54
304.101	SAND	CY	1,300.00	\$16.58	\$21,554.00	\$15.00	\$19,500.00	\$2,054.00
304.201	GRAVEL	CY	230.00	\$17.05	\$3,921.50	\$25.00	\$5,750.00	(\$1,828.50)

# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No:	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
304.399	TEMPORARY CRUSHED GRAVEL	CY	205.00	\$26.75	\$5,483.75	\$24.00	\$4,920.00	\$563.75
304.4	CRUSHED STONE (FINE GRADATION) (F)	CY	1,095.00	\$22.09	\$24,188.55	\$18.00	\$19,710.00	\$4,478.55
304.45	CRUSHED STONE (FINE GRADATION) FOR DRIVES	CY	400.00	\$29.93	\$11,972.00	\$25.00	\$10,000.00	\$1,972.00
304.5	CRUSHED STONE (COARSE GRADATION) (F)	CY	1,900.00	\$20.68	\$39,292.00	\$18.00	\$34,200.00	\$5,092.00
403.11002	HOT BITUMINOUS PAVEMENT, MACHINE METHOD (QC/QA TIER 2)	TON	1,450.00	\$75.42	\$109,359.00	\$70.00	\$101,500.00	\$7,859.00
403.1109	HOT BITUMINOUS PAVEMENT, MACHINE METHOD, HIGH STRENGTH	TON	800.00	\$85.62	\$68,496.00	\$75.00	\$60,000.00	\$8,496.00
403.12	HOT BITUMINOUS PAVEMENT, HAND METHOD	TON	335.00	\$110.00	\$36,850.00	\$95.00	\$31,825.00	\$5,025.00
403.6	PAVEMENT JOINT ADHESIVE	LF	29,300.00	\$0.23	\$6,739.00	\$0.25	\$7,325.00	(\$586.00)
403.99	TEMPORARY BITUMINOUS PAVEMENT	TON	180.00	\$102.54	\$18,457.20	\$95.00	\$17,100.00	\$1,357.20
411.1	HOT BITUMINOUS CONCRETE LEVELING COURSE	TON	200.00	\$80.00	\$16,000.00	\$75.00	\$15,000.00	\$1,000.00
415.8	GLASS FIBER PAVEMENT REINFORCEMENT MESH	SY	6,400.00	\$9.19	\$58,816.00	\$8.00	\$51,200.00	\$7,616.00
417	COLD PLANING BITUMINOUS SURFACES	SY	3,450.00	\$2.64	\$9,108.00	\$1.50	\$5,175.00	\$3,933.00
520.1	CONCRETE CLASS A	CY	3.00	\$450.00	\$1,350.00	\$600.00	\$1,800.00	(\$450.00)
544.1	REINFORCING STEEL (ROADWAY)	LB	40.00	\$2.00	\$80.00	\$1.00	\$40.00	\$40.00
585.3	STONE FILL, CLASS C	CY	30.00	\$28.82	\$864.60	\$25.00	\$750.00	\$114.60
593.421	GEOTEXTILE; PERM CONTROL CL.2, NON-WOVEN	SY	85.00	\$2.00	\$170.00	\$2.00	\$170.00	\$0.00
603.0001	VIDEO INSPECTION	LF	800.00	\$0.91	\$728.00	\$1.00	\$800.00	(\$72.00)
603.00212	12" R.C. PIPE, 2000D	LF	440.00	\$32.98	\$14,511.20	\$36.00	\$15,840.00	(\$1,328.80)

# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No:	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
603.00215	15" R.C. PIPE, 2000D	LF	120.00	\$57.44	\$6,892.80	\$40.00	\$4,800.00	\$2,092.80
603.00218	18" R.C. PIPE, 2000D	LF	120.00	\$61.26	\$7,351.20	\$44.00	\$5,280.00	\$2,071.20
603.00318	18" R.C. PIPE, 3000D	LF	55.00	\$60.69	\$3,337.95	\$46.00	\$2,530.00	\$807.95
603.00324	24" R.C. PIPE, 3000D	LF	55.00	\$73.89	\$4,063.95	\$52.00	\$2,860.00	\$1,203.95
603.30112	12" R.C. END SECTIONS	EA	4.00	\$400.00	\$1,600.00	\$550.00	\$2,200.00	(\$600.00)
603.30115	15" R.C. END SECTIONS	EA	3.00	\$460.00	\$1,380.00	\$600.00	\$1,800.00	(\$420.00)
603.30118	18" R.C. END SECTIONS	EA	3.00	\$520.00	\$1,560.00	\$650.00	\$1,950.00	(\$390.00)
603.30124	24" R.C. END SECTIONS	EA	2.00	\$600.00	\$1,200.00	\$700.00	\$1,400.00	(\$200.00)
604.0007	POLYETHYLENE LINER	EA	6.00	\$120.00	\$720.00	\$150.00	\$900.00	(\$180.00)
604.12	CATCH BASINS TYPE B	U	8.00	\$2,384.01	\$19,072.08	\$2,000.00	\$16,000.00	\$3,072.08
604.19	SPECIAL CATCH BASINS	U	1.00	\$1,717.54	\$1,717.54	\$2,800.00	\$2,800.00	(\$1,082.46)
604.32	DRAINAGE MANHOLES	U	1.00	\$1,762.83	\$1,762.83	\$2,000.00	\$2,000.00	(\$237.17)
604.5	RECONSTRUCTING/ADJUSTING MANHOLES	LF	2.00	\$393.30	\$786.60	\$250.00	\$500.00	\$286.60
606.1254	BEAM GUARDRAIL (TERMINAL UNIT TYPE EAGRT 50 FT) (STEEL POST)	U	5.00	\$1,960.00	\$9,800.00	\$1,700.00	\$8,500.00	\$1,300.00
606.1255	BEAM GUARDRAIL (TERMINAL UNIT TYPE EAGRT 25 FT) (STEEL POST)	U	1.00	\$1,760.00	\$1,760.00	\$1,500.00	\$1,500.00	\$260.00
606.18001	31" W-BEAM GUARDRAIL WITH 8" OFFSET BLOCK (STEEL POST)	LF	1,250.00	\$17.77	\$22,212.50	\$16.00	\$20,000.00	\$2,212.50
606.417	PORTABLE CONCRETE BARRIER FOR TRAFFIC CONTROL	LF	520.00	\$4.97	\$2,584.40	\$20.00	\$10,400.00	(\$7,815.60)
606.9513	TEMP. IMPACT ATTENUATION DEVICE (REDIRECTIVE), TEST LEVEL 3	U	2.00	\$7,950.00	\$15,900.00	\$5,000.00	\$10,000.00	\$5,900.00
609.01	STRAIGHT GRANITE CURB	LF	350.00	\$19.04	\$6,664.00	\$17.00	\$5,950.00	\$714.00
609.21	STRAIGHT GRANITE SLOPE CURB	LF	110.00	\$14.91	\$1,640.10	\$14.00	\$1,540.00	\$100.10

# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No.	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
612.189	ALTERATIONS TO SEPTIC SYSTEM	U	1.00	\$1,152.15	\$1,152.15	\$2,000.00	\$2,000.00	(\$847.85)
614.331	3" STEEL CONDUIT	LF	10.00	\$20.00	\$200.00	\$16.00	\$160.00	\$40.00
614.511	CONCRETE PULL BOX 14"	EA	5.00	\$325.00	\$1,625.00	\$285.00	\$1,425.00	\$200.00
614.73114	3" PVC CONDUIT, SCHEDULE 40	LF	105.00	\$25.00	\$2,625.00	\$6.50	\$682.50	\$1,942.50
614.73118	3" PVC CONDUIT, SCHEDULE 80	LF	220.00	\$35.00	\$7,700.00	\$10.00	\$2,200.00	\$5,500.00
615.03	TRAFFIC SIGN TYPE C (F)	SF	191.00	\$40.00	\$7,640.00	\$42.00	\$8,022.00	(\$382.00)
615.06	TRAFFIC SIGN TYPE CC (F)	SF	84.00	\$20.00	\$1,680.00	\$11.00	\$924.00	\$756.00
616.101	TRAFFIC SIGNALS	U	1.00	\$83,500.00	\$83,500.00	\$85,000.00	\$85,000.00	(\$1,500.00)
618.61	UNIFORMED OFFICERS WITH VEHICLE	\$	71,000.00	\$1.00	\$71,000.00	\$1.00	\$71,000.00	\$0.00
618.7	FLAGGERS	HR	2,100.00	\$20.50	\$43,050.00	\$21.00	\$44,100.00	(\$1,050.00)
619.1	MAINTENANCE OF TRAFFIC	U	1.00	\$36,226.16	\$36,226.16	\$25,000.00	\$25,000.00	\$11,226.16
619.25	PORTABLE CHANGEABLE MESSAGE SIGN	U	2.00	\$3,600.00	\$7,200.00	\$3,500.00	\$7,000.00	\$200.00
619.27	TRAILER-MOUNTED SPEED LIMIT SIGN	U	2.00	\$1,600.00	\$3,200.00	\$3,500.00	\$7,000.00	(\$3,800.00)
621.2	RETROREFLECTIVE BEAM GUARDRAIL DELINEATOR	EA	20.00	\$4.00	\$80.00	\$4.00	\$80.00	\$0.00
622.1	STEEL WITNESS MARKERS	EA	15.00	\$17.00	\$255.00	\$25.00	\$375.00	(\$120.00)
622.2	CONCRETE BOUNDS	EA	8.00	\$168.00	\$1,344.00	\$300.00	\$2,400.00	(\$1,056.00)
628.2	SAWED BITUMINOUS PAVEMENT	LF	3,800.00	\$1.01	\$3,838.00	\$1.00	\$3,800.00	\$38.00
632.0104	RETROREFLECTIVE PAINT PAVE. MARKING, 4" LINE	LF	42,600.00	\$0.20	\$8,520.00	\$0.10	\$4,260.00	\$4,260.00
632.0118	RETROREFLECTIVE PAINT PAVE. MARKING, 18" LINE	LF	170.00	\$1.50	\$255.00	\$1.00	\$170.00	\$85.00
632.3104	RETROREFLECT. THERMOPLAS. PAVE. MARKING, 4" LINE	LF	200.00	\$1.50	\$300.00	\$1.00	\$200.00	\$100.00
632.3118	RETROREFLECT. THERMOPLAS. PAVE. MARKING, 18" LINE	LF	90.00	\$5.00	\$450.00	\$4.00	\$360.00	\$90.00

# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No:	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
632.32	RETROREFLECT. THERMOPLAS. PAVEMENT MARKING, SYMBOL OR WORD	SF	290.00	\$5.00	\$1,450.00	\$5.00	\$1,450.00	\$0.00
632.911	OBLITERATE PAVE. MARKING LINE, 12" WIDE & UNDER	LF	9,150.00	\$0.75	\$6,862.50	\$0.50	\$4,575.00	\$2,287.50
641	LOAM	CY	300.00	\$28.51	\$8,553.00	\$23.00	\$6,900.00	\$1,653.00
645.3	EROSION STONE	TON	100.00	\$27.82	\$2,782.00	\$25.00	\$2,500.00	\$282.00
645.43	TEMPORARY SLOPE STABILIZATION TYPE C	SY	1,150.00	\$1.75	\$2,012.50	\$1.75	\$2,012.50	\$0.00
645.531	SILT FENCE	LF	6,250.00	\$1.93	\$12,062.50	\$1.50	\$9,375.00	\$2,687.50
645.7	STORM WATER POLLUTION PREVENTION PLAN	U	1.00	\$2,400.00	\$2,400.00	\$2,500.00	\$2,500.00	(\$100.00)
645.71	MONITORING SWPPP AND EROSION AND SEDIMENT CONTROLS	HR	360.00	\$65.00	\$23,400.00	\$55.00	\$19,800.00	\$3,600.00
646.3	TURF ESTABLISHMENT WITH MULCH AND TACKIFIERS	A	1.50	\$1,950.00	\$2,925.00	\$1,750.00	\$2,625.00	\$300.00
647.1	HUMUS	CY	500.00	\$22.29	\$11,145.00	\$15.00	\$7,500.00	\$3,645.00
670.066	MAILBOX SUPPORT ASSEMBLIES	EA	5.00	\$61.67	\$308.35	\$150.00	\$750.00	(\$441.65)
670.104	TEMPORARY PORTABLE LIGHTING	U	1.00	\$1,870.80	\$1,870.80	\$3,000.00	\$3,000.00	(\$1,129.20)
670.401	FOUNDATION PRELOAD	U	1.00	\$16,724.12	\$16,724.12	\$20,000.00	\$20,000.00	(\$3,275.88)
692	MOBILIZATION	U	1.00	\$36,498.66	\$36,498.66	\$50,000.00	\$50,000.00	(\$13,501.34)
697.11	INVASIVE SPECIES CONTROL AND MANAGEMENT PLAN	U	1.00	\$750.00	\$750.00	\$1,000.00	\$1,000.00	(\$250.00)
697.31	PROJECT OPERATIONS PLAN	U	1.00	\$2,000.00	\$2,000.00	\$2,000.00	\$2,000.00	\$0.00
697.41	CRITICAL PATH METHOD (CPM) ELECTRONIC SCHEDULE	U	1.00	\$884.00	\$884.00	\$2,000.00	\$2,000.00	(\$1,116.00)
698.13	FIELD OFFICE TYPE C	MON	16.00	\$1,200.00	\$19,200.00	\$1,200.00	\$19,200.00	\$0.00



# A - PS&E Comparison

PS&E = NHDOT Cost Estimate

Item No:	Description	Unit	Quantity	A-Bidder		PS&E		A-PS&E Difference
				Unit Price	Total	Unit Price	Total	
699	MISCELLANEOUS TEMPORARY EROSION AND SEDIMENT CONTROL	\$	5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00	\$0.00
1009.21	TREATMENT OR DISPOSAL OF CONTAMINATED GROUNDWATER (FRAC TANK)	\$	5,000.00	\$1.00	\$5,000.00	\$1.00	\$5,000.00	\$0.00
1010.15	FUEL ADJUSTMENT	\$	20,000.00	\$1.00	\$20,000.00	\$1.00	\$20,000.00	\$0.00
1010.2	ASPHALT CEMENT ADJUSTMENT	\$	10,000.00	\$1.00	\$10,000.00	\$1.00	\$10,000.00	\$0.00
1010.3	QUALITY CONTROL QUALITY ASSURANCE(QC/QA) ASPHALT	\$	5,075.00	\$1.00	\$5,075.00	\$1.00	\$5,075.00	\$0.00
					\$1,135,314.54		\$1,035,628.50	\$99,686.04





# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

4/4/2014

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

**IMPORTANT:** If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Aspen Insurance Agency P O Box 510  Manchester NH 03105	CONTACT NAME: Karen Case	
	PHONE (A/C, No, Ext): (603) 647-0800 FAX (A/C, No): (603) 647-0330 E-MAIL ADDRESS: kcase@aspen-ins.com	
INSURED American Excavating Corp 5 Madden Road PO Box 1220 Derry NH 03038	INSURER(S) AFFORDING COVERAGE	NAIC #
	INSURER A: Cincinnati Insurance Company	10677
	INSURER B: Memic	
	INSURER C:	
	INSURER D:	
	INSURER E:	

COVERAGES CERTIFICATE NUMBER: CL1432507039 REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR			CPP1059983	4/1/2014	4/1/2015	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 500,000 MED EXP (Any one person) \$ 10,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000
	GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PROJECT <input type="checkbox"/> LOC						
A	AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO ALL OWNED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input type="checkbox"/> SCHEDULED AUTOS NON-OWNED AUTOS			CPA1059983 Pollution endt#AA4012	4/1/2014	4/1/2015	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ Endorsement \$ 500,000
	Pollution endt#AA4012						
A	<input checked="" type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE			CPP1059983	4/1/2014	4/1/2015	EACH OCCURRENCE \$ 5,000,000 AGGREGATE \$ 5,000,000
	DED RETENTION \$						
B	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below		Y/N <input checked="" type="checkbox"/> N/A	3102800890 MA & NH	4/1/2014	4/1/2015	<input checked="" type="checkbox"/> WC STATUTORY LIMITS <input type="checkbox"/> OTHER E.L. EACH ACCIDENT \$ 500,000 E.L. DISEASE - EA EMPLOYEE \$ 500,000 E.L. DISEASE - POLICY LIMIT \$ 500,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)  
Re: The Town / City of Derry Project No. X-A000(897), 15690. This project consists off widening NH 28, providing travel lanes, left turn lanes and shoulders. Cancellation: 30 days Except 10 days for non-payment of premium.

**CERTIFICATE HOLDER****CANCELLATION**

The State of New Hampshire  
Department of Transportation  
7 Hazen Drive  
Concord, NH 03301

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

Karen Case/KAREN



# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
4/4/2014

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Aspen Insurance Agency P O Box 510  Manchester NH 03105	CONTACT NAME: Karen Case	
	PHONE (A/C, No, Ext): (603) 647-0800	FAX (A/C, No): (603) 647-0330
	E-MAIL ADDRESS: kcase@aspen-ins.com	
	INSURER(S) AFFORDING COVERAGE	NAIC #
	INSURER A: Cincinnati Insurance Company	10677
INSURED The State of New Hampshire Dept of Transportation c/o American Excavating PO Box 1220 Derry NH 03038	INSURER B:	
	INSURER C:	
	INSURER D:	
	INSURER E:	
	INSURER F:	

COVERAGES CERTIFICATE NUMBER: CL144707071 REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	GENERAL LIABILITY			CAP5234311	4/4/2014	4/4/2015	EACH OCCURRENCE \$ 2,000,000
	<input type="checkbox"/> COMMERCIAL GENERAL LIABILITY						DAMAGE TO RENTED PREMISES (Ea occurrence) \$
	<input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR						MED EXP (Any one person) \$
	<input checked="" type="checkbox"/> OCIP						PERSONAL & ADV INJURY \$
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE \$ 3,000,000
	<input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC						PRODUCTS - COMP/OP AGG \$
	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident) \$
	<input type="checkbox"/> ANY AUTO						BODILY INJURY (Per person) \$
	<input type="checkbox"/> ALL OWNED AUTOS	<input type="checkbox"/> SCHEDULED AUTOS					BODILY INJURY (Per accident) \$
	<input type="checkbox"/> HIRED AUTOS	<input type="checkbox"/> NON-OWNED AUTOS					PROPERTY DAMAGE (Per accident) \$
	<input type="checkbox"/> UMBRELLA LIAB	<input type="checkbox"/> OCCUR					EACH OCCURRENCE \$
	<input type="checkbox"/> EXCESS LIAB	<input type="checkbox"/> CLAIMS-MADE					AGGREGATE \$
	<input type="checkbox"/> DED <input type="checkbox"/> RETENTION \$						\$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY						WC STATUTORY LIMITS OTH-ER
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH)	<input type="checkbox"/> Y/N	N/A				E.L. EACH ACCIDENT \$
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE \$
							E.L. DISEASE - POLICY LIMIT \$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)  
RE: the Town/City of Derry Project NO. X-A000(897), 15690. This project consists of widening NH 28, providing travel lanes, left turn lanes and shoulders.

## CERTIFICATE HOLDER

## CANCELLATION

The State of New Hampshire  
Department of Transportation  
7 Hazen Drive  
Concord, NH 03301

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

Karen Case/KAREN